


Product description	LED-lights, Contacts: 4, IP67, UL listed, VDE
Area	LED-lights series 976
Order number	28 1200 000 04


Illustration



Scale drawing

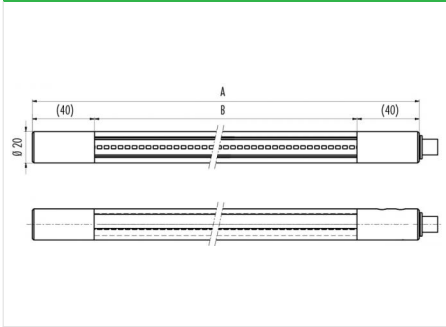

Contact arrangement

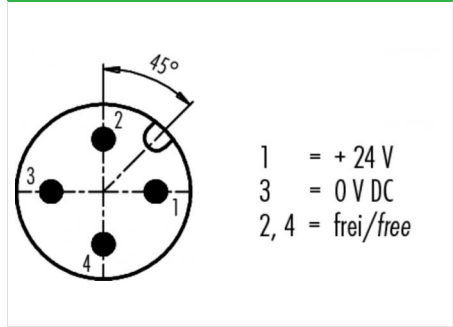

Technical data

Upper limit temperature	60 °C	Current consumption	238 mA
Lower limit temperature	- 25 °C		
Customs tariff number	9405109890		
Housing material	aluminum		
Degree of protection	IP67		
Degree of protection 2	IP68		
Degree of protection 3	IP69K		
Approval 1	UL listed		
Approval 2	VDE		
Weight (g)	127		
Luminaire length	250 mm		
Service life	50000 h		
Connection	M12		
Diameter	20 mm		
Radiation angle	120 °		
Luminous efficacy of luminaire	72 lm/W		
Luminous flux	410		
Light colour	4000 K (nw)		
Colour rendering (RA/CRI)	>90		
Voltage	24 V DC		
Number of LEDs per luminaire	60		

Product description **LED-lights, Contacts: 4, IP67, UL listed, VDE**

Area **LED-lights series 976**
Order number **28 1200 000 04**

Security notices

Connectors with degree of protection IP 67 and IP 68 are not suitable for use under water. When used outdoors, the connectors must be separately protected against corrosion. For further information about IP degrees of protection refer to 'Technical support' in the Download Centre.