


Product description	M8 female angled connector, Contacts: 3, unshielded, moulded cable, IP67, UL listed, PVC grey, 3 x 0.34 mm ² , 2 m
Area	M8 series 718
Part no.	77 3608 0000 20003-0200


Illustration




Pin assignment plans

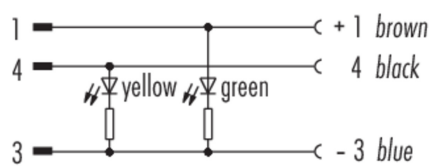

Scale drawing

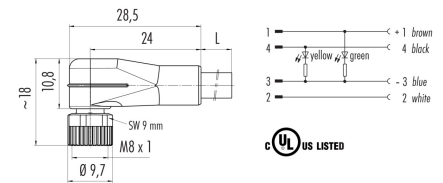

Contact arrangement (Plug-in side)

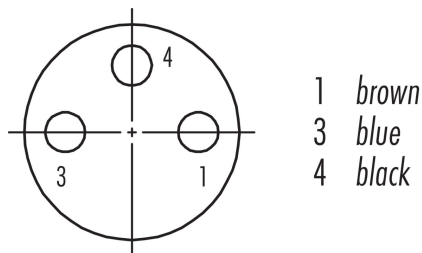

Technical data

General features

Part no.	77 3608 0000 20003-0200
Connector design	female angled connector
Cable length	2 m
Version	connector female angled
Connector locking system	screw
Termination	moulded cable
Degree of protection	IP67
Cross-sectional area	0.34 mm ² / AWG 22
Temperature range from/to	-25 °C / 85 °C
Mechanical operation	> 100 Mating cycles
Weight (g)	159
Customs tariff number	85444290

Product description	M8 female angled connector, Contacts: 3, unshielded, moulded cable, IP67, UL listed, PVC grey, 3 x 0.34 mm², 2 m
Area	M8 series 718
Part no.	77 3608 0000 20003-0200

Electrical parameters

Rated voltage	10 - 30 V
Rated impulse voltage	500 V
Rated current (40 °C)	4 A
Pollution degree	3
Overvoltage category	II
Insulating material group	II
EMC compliance	unshielded

Material

Housing material	PUR
Contact body material	PUR
Contact material	CuZn (brass)
Contact plating	Au (gold)
Locking material	Zinc die-cast nickel-plated
REACH SVHC	CAS 7439-92-1 (Lead)
SCIP number	f6d23418-bb33-4eda-b2a1-99d3b8f3d86f

Authorization/approvals

Approvals	UL listed
-----------	-----------

Classifications

eCl@ss 11.1	27-06-03-11
ETIM 7.0	EC001855

Declarations of conformity

RoHS Directive	2011/65/EU (EN 50581:2012)
----------------	----------------------------

Cable data - Structure of the cable

Cable diameter	4.5 mm
Cross section	3 x 0.34 mm ²
Sheath material	PVC
Single-lead insulation	PVC
Single-lead structure	42 x 0.10 mm mm
Cable color	grey

Cable data - Electrical properties

Conductor resistance	57 Ω/Km (20°C)
----------------------	----------------

Product description	M8 female angled connector, Contacts: 3, unshielded, moulded cable, IP67, UL listed, PVC grey, 3 x 0.34 mm², 2 m
Area	M8 series 718
Part no.	77 3608 0000 20003-0200

Cable data - Mechanical properties

Bending radius, fixed cable	$\geq 5 \times \varnothing$
Bending radius, moving cable	$\geq 10 \times \varnothing$
Bending cycles	>2 million
Permitted acceleration	max. 5 m/s ² + 1 m/s ²
Travel distance, horizontal	5 m/s ² -> 5 m
Travel distance, vertical	5 m/s ² -> 5 m
Travel speed	≤ 200 m/min (5 m horizontal distance)

Cable data - Thermal properties

Temperature range cable in move from/to	-5 °C / 105 °C
Temperature range cable fixed from/to	-40 °C / 105 °C

Cable data - Other features

Halogen free	No
--------------	----

Product description	M8 female angled connector, Contacts: 3, unshielded, moulded cable, IP67, UL listed, PVC grey, 3 x 0.34 mm², 2 m
Area	M8 series 718
Part no.	77 3608 0000 20003-0200

Security notices

The connectors have been developed for applications in plant engineering, control and electrical equipment construction. The user is responsible for checking whether the connectors can also be used in other areas of application.

Plug connectors with enclosure protection IP 67 and IP 68 are not suitable for use under water. When used outdoors, the plug connectors must be protected separately against corrosion. For further information on the IP protection classes, please refer to the "Technical Information" download centre.

To lock the cable connector with the device connector, the threaded ring is tightened "hand-tight" (approx. 50 cNm).